


JFB500# 自润滑翻边轴套 JFB500# Self-lubricating Flanged Bushes

JFB500# 自润滑翻边轴套 JFB500# Self-lubricating Flanged Bushes

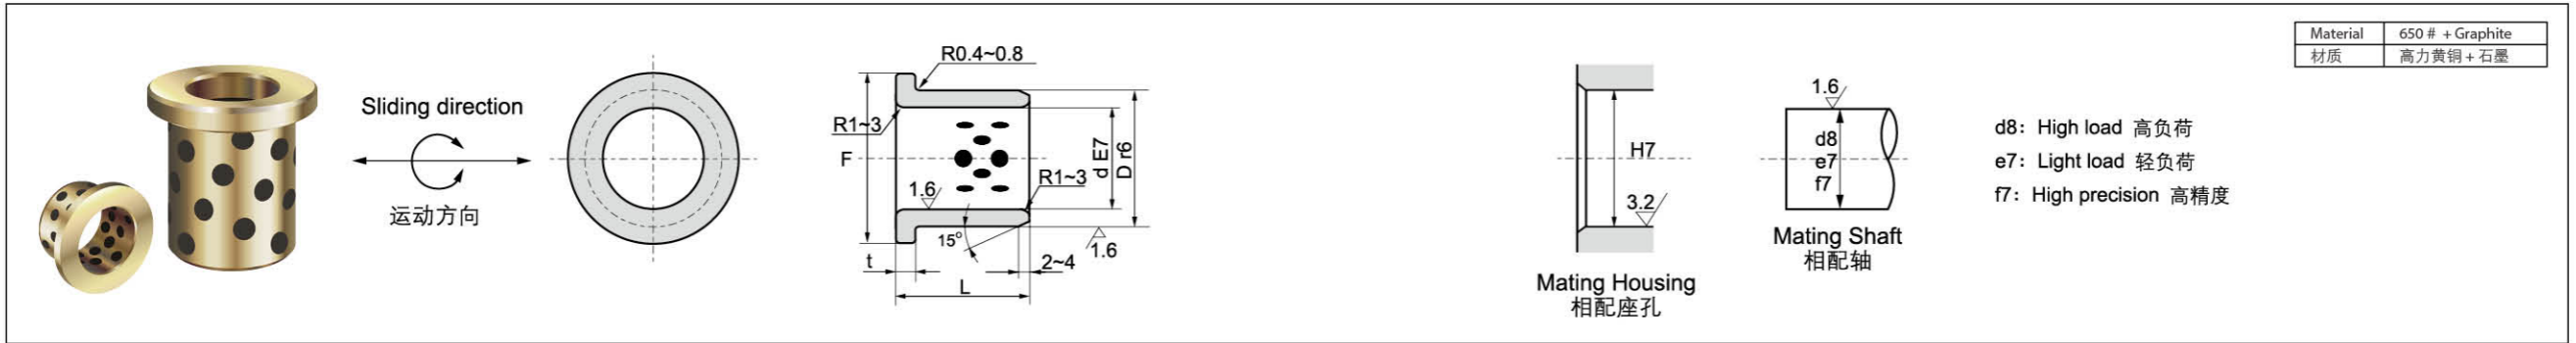

Unit (单位): mm

| 内径 E7 I.D. ϕd | 外径 r6 O.D. ϕD | 翻边 Flange | | 长度 L _{-0.1} | | | | | | | | | | | | | | | | | |
|------------------------|------------------------|-----------|------------------|----------------------|----|----|----|----|----|----|----|--|--|--|--|--|--|--|--|--|--|
| | | ϕF | t | 10 | 12 | 15 | 17 | 18 | 20 | 23 | 25 | | | | | | | | | | |
| 6 | +0.032 +0.020 | 10 | +0.028 +0.019 | 16 | | | | | | | | | | | | | | | | | |
| 8 | +0.040 +0.025 | 12 | | 20 | | | | | | | | | | | | | | | | | |
| 10 | | 14 | +0.034 +0.023 | 22 | | | | | | | | | | | | | | | | | |
| 12 | | 18 | | 25 | | | | | | | | | | | | | | | | | |
| 13 | | 19 | | 26 | | | | | | | | | | | | | | | | | |
| 14 | +0.050 +0.032 | 20 | | 27 | | | | | | | | | | | | | | | | | |
| 15 | | 21 | +0.041 +0.028 | 28 | | | | | | | | | | | | | | | | | |
| 16 | | 22 | | 29 | | | | | | | | | | | | | | | | | |
| 18 | | 24 | | 32 | | | | | | | | | | | | | | | | | |
| 20 | | 30 | | 40 | | | | | | | | | | | | | | | | | |
| 25 | +0.061 +0.040 | 35 | | 45 | | | | | | | | | | | | | | | | | |
| 30 | | 40 | | 50 | | | | | | | | | | | | | | | | | |
| 31.5 | | 40 | +0.050 +0.034 | 50 | | | | | | | | | | | | | | | | | |
| 35 | | 45 | | 60 | | | | | | | | | | | | | | | | | |
| 40 | +0.075 +0.050 | 50 | | 65 | | | | | | | | | | | | | | | | | |
| 45 | | 55 | | 70 | | | | | | | | | | | | | | | | | |
| 50 | | 60 | +0.060 +0.041 | 75 | | | | | | | | | | | | | | | | | |
| 55 | | 65 | | 80 | | | | | | | | | | | | | | | | | |
| 60 | | 75 | | 90 | | | | | | | | | | | | | | | | | |
| 63 | | 80 | +0.062 +0.043 | 85 | | | | | | | | | | | | | | | | | |
| 65 | +0.090 +0.060 | 80 | | 95 | | | | | | | | | | | | | | | | | |
| 70 | | 85 | | 105 | | | | | | | | | | | | | | | | | |
| 75 | | 90 | +0.073 +0.051 | 110 | | | | | | | | | | | | | | | | | |
| 80 | | 100 | | 120 | | | | | | | | | | | | | | | | | |
| 90 | | 110 | +0.076 +0.054 | 130 | | | | | | | | | | | | | | | | | |
| 100 | +0.107 +0.072 | 120 | | 150 | | | | | | | | | | | | | | | | | |
| 120 | | 140 | +0.088 +0.063 | 170 | | | | | | | | | | | | | | | | | |
| 130 | | 150 | | 180 | | | | | | | | | | | | | | | | | |
| 140 | | 160 | +0.090 +0.065 | 190 | | | | | | | | | | | | | | | | | |
| 150 | +0.125 +0.085 | 170 | | 200 | | | | | | | | | | | | | | | | | |
| 160 | | 180 | +0.093 +0.068 | 210 | | | | | | | | | | | | | | | | | |

| 长度 L _{-0.1} | | | | | | | | | 压装后内孔 I.D. After Press-Fitting | 内径 I.D. ϕd |
|----------------------|------|------|------|------|------|-------|--------|--------|--------------------------------------|---------------------|
| 30 | 35 | 40 | 50 | 60 | 67.5 | 80 | 100 | 120 | | |
| | | | | | | | | | +0.016 +0.004 | 6 |
| | | | | | | | | | +0.021 +0.006 | 8 |
| | | | | | | | | | +0.031 +0.013 | 10 |
| 1230 | | | | | | | | | | 12 |
| 1330 | | | | | | | | | | 13 |
| | | | | | | | | | | 14 |
| 1530 | | | | | | | | | +0.026 +0.008 | 15 |
| 1630 | 1635 | 1640 | | | | | | | | 16 |
| 1830 | 1835 | 1840 | | | | | | | | 18 |
| 2030 | 2035 | 2040 | | | | | | | +0.037 +0.016 | 20 |
| 2530 | 2535 | 2540 | 2550 | | | | | | +0.032 +0.011 | 25 |
| 3030 | 3035 | 3040 | 3050 | | | | | | | 30 |
| 3130 | 3135 | 3140 | | | | | | | | 31.5 |
| 3530 | 3535 | 3540 | 3550 | | | | | | +0.046 +0.021 | 35 |
| 4030 | 4035 | 4040 | 4050 | | | | | | | 40 |
| 4530 | 4535 | 4540 | 4550 | 4560 | | | | | +0.040 +0.015 | 45 |
| 5030 | 5035 | 5040 | 5050 | 5060 | | | | | +0.055 +0.025 | 50 |
| | | 5540 | 5560 | | | | | | | 55 |
| | | 6040 | 6050 | 6060 | | | | | | 60 |
| | | | | | 6367 | | | | +0.053 +0.023 | 63 |
| | | | | 6560 | | | | | | 65 |
| | | | 7050 | | | | | | | 70 |
| | | | | 7560 | | | | | +0.046 +0.016 | 75 |
| | | | | 8060 | | 8080 | | | | 80 |
| | | | | 9060 | | 9080 | | | +0.060 +0.025 | 90 |
| | | | | | | 10080 | | | | 100 |
| | | | | | | 12080 | | | +0.052 +0.017 | 120 |
| | | | | | | 13080 | | | +0.068 +0.028 | 130 |
| | | | | | | 14080 | | | | 140 |
| | | | | | | | 150100 | 150120 | +0.065 +0.025 | 150 |
| | | | | | | | 160100 | 160120 | | 160 |