


**JDB500# 自润滑轴套**  
**JDB500# Cylindrical Oilless Bearing**

**JDB500# 自润滑轴套**  
**JDB500# Cylindrical Oilless Bearing**

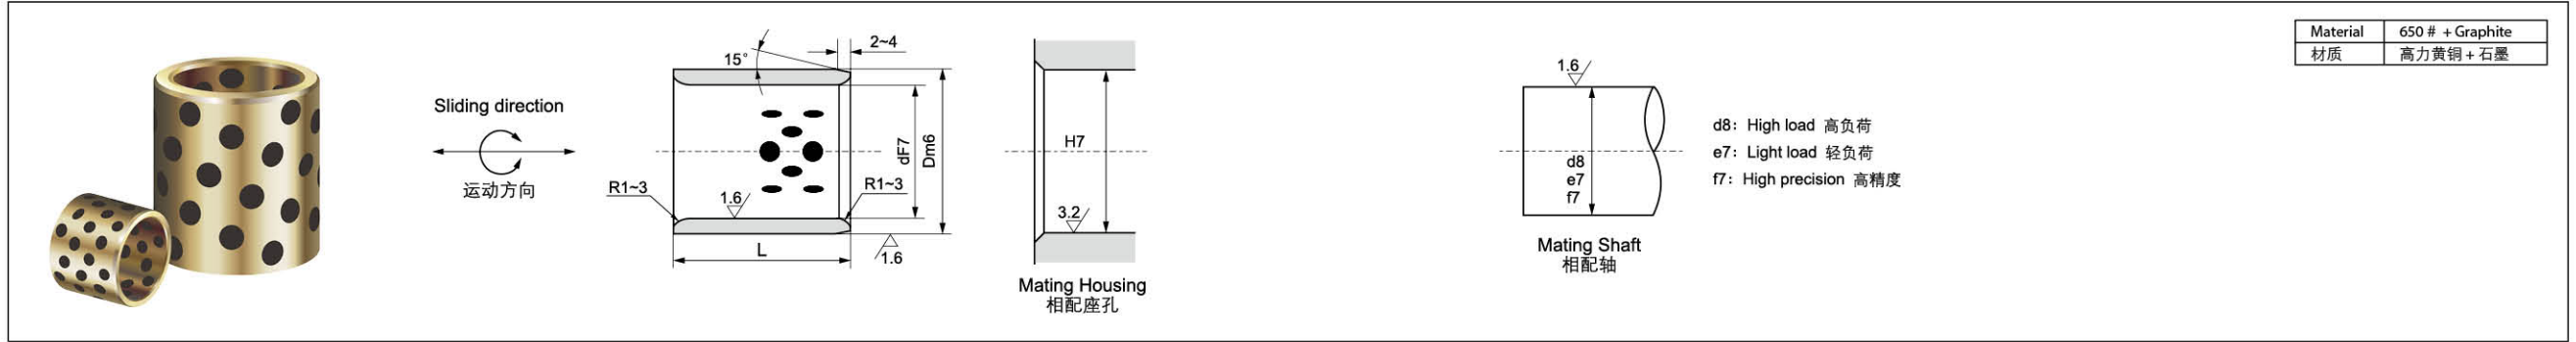

Unit (单位): mm

内径 F7 I.D. $\phi d$	外径 m6 O.D. $\phi D$	长度 L <sup>-0.1</sup> <sub>-0.3</sub>												
		8	10	12	15	16	19	20	25					
6	+0.022 +0.010	10	+0.015 +0.006	061008	061010	061012								
8	+0.028 +0.013	12		081208	081210	081212	081215							
10		14	+0.018 +0.007	101408	101410	101412	101415			101420				
12		18		121808	121810	121812	121815	121816	121819	121820	121825			
13		19			131910	131912	131915			131920	131925			
14		20			142010	142012	142015			142020	142025			
15	+0.034 +0.016	21			152110	152112	152115	152116		152120	152125			
16		22			162210	162212	162215	162216	162219	162220	162225			
17		23	+0.021 +0.008				172315							
18		24			182410	182412	182415	182416		182420	182425			
19		26					192615			192620				
20		28			202810	202812	202815	202816	202819	202820	202825			
		30			203010	203012	203015	203016		203020	203025			
22		32					223212	223215		223220	223225			
25	+0.041 +0.020	33					253312	253315		253320	253325			
		35					253512	253515	253516	253520	253525			
28		38						283816		283820	283825			
30		40	+0.025 +0.009				303812	303815		303820	303825			
		42					304012	304015		304020	304025			
32		44								324220				
35		45								354420	354425			
		48								354520	354525			
38		48												
40	+0.050 +0.025	50					405015			405020	405025			
		55					405515							
45		56	+0.030 +0.011											
		60												

长度 L <sup>-0.1</sup> <sub>-0.3</sub>							压装后内孔 I.D. After Press-Fitting	适用垫片 JTW	内径 I.D. $\phi d$
30	35	40	50	60	70	80			
							+0.019 +0.007	—	6
							+0.025 +0.010	—	8
							+0.031 +0.013	10	10
121830								12	12
131930								13	13
142030								14	14
152130	152135							15	15
162230	162235						+0.030 +0.012	16	16
								18	17
182430	182435							18	18
								20	19
202830	202835	202840	202850					20	20
203030	203035	203040	203050					20	20
								25	22
253330	253335	253340	253350	253360				25	25
253530	253535	253540	253550	253560				25	25
283830		283840						30	28
303830	303835	303840	303850	303860			+0.037 +0.016	30	30
304030	304035	304040	304050	304060				30	30
324230		324240						35	32
354430	354435	354440	354450	354460				35	35
354530	354535	354540	354550	354560				35	35
		384840						40	38
405030	405035	405040	405050	405060	405070	405080		40	40
405530	405535	405540	405550	405560				40	40
455530	455535	455540	455550	455560				45	45
455630	455635	455640	455650	455660			+0.045 +0.020	45	45
456030	456035	456040	456050	456060	456070	456080		45	45